



CASE DATA Amps (per ft)	8'	12'
Anti-Sweat	1.35	1.93
STD Fan	0.94	1.08
Defrost Load (if elec-230V)	11.3	14.8

All electrical data based on 115V.

DEFROST CONTROLS			
Defrost	Per Day	Fail Safe	Termination
Off Cycle	4	40min	48°F
Electric	4	30 min	55°F

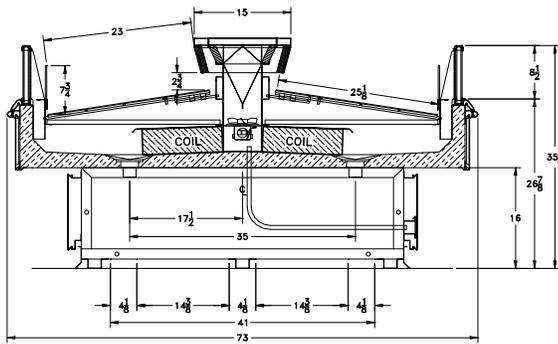

Add 3" thickness for a pair of ends.

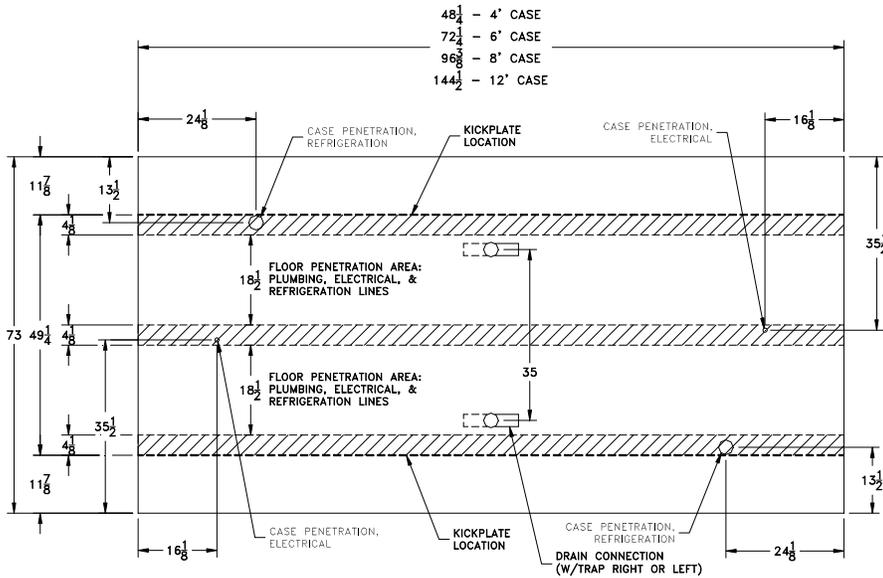

Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained such that conditions do not exceed 75°F and 55% relative humidity. Kysor/Warren®, whose policy is one of continuous improvement, reserves the right to change at anytime, specifications, design or prices without incurring obligation. Dual-Jet® and Air Defrost® are registered trademarks of Kysor/Warren®.

BTUH per FT	
STD Fan	733

CAPACITIES		
	8'	12'
Facing Area	42 ft ²	84 ft ²
Cubic Capacity	14.4 ft ³	21.6 ft ³

Evap Temp	Discharge Air Velocity (1 hr. after defrost)	Discharge Air Temp
+15°F	270 - 425 FPM	32-38°F

Issue: 6.1.2010

