
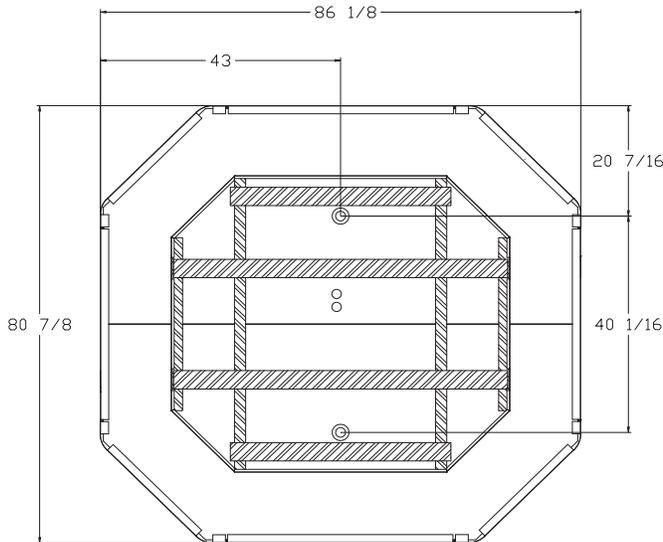


| | |
|------------------------------------|---------------|
| CASE DATA AMPS | Island |
| STD Fan / No. of Motors | 3.24/6 |
| PSC Fan / No. of Motors | 1.56/6 |
| ECM Fan / No. of Motors | 1.50/6 |
| All electrical data based on 115V. | |

| DEFROST CONTROLS | | | |
|------------------|---------|-----------|-------------|
| Defrost | Per Day | Fail Safe | Termination |
| Off Cycle | 4 | 40 min. | 55°F |

Note: Installation & Operation Manual for this model contains detailed information regarding this case.

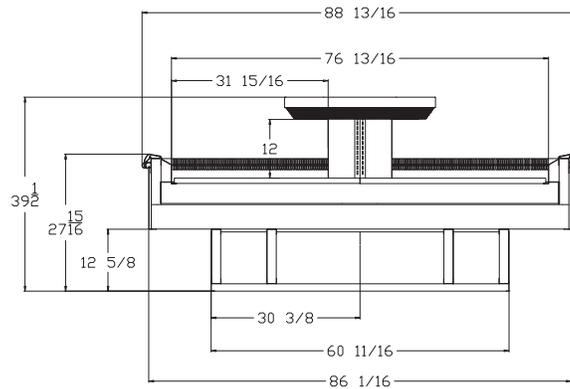

Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained such that conditions do not exceed 75°F and 55% relative humidity. Kysor/Warren®, whose policy is one of continuous improvement, reserves the right to change at anytime, specifications, design or prices without incurring obligation. Dual-Jet® and Air Defrost® are registered trademarks of Kysor/Warren®.

| BTUH | |
|--|------|
| STD Fan | 8400 |
| PSC Fan | 8220 |
| ECM Fan | 8040 |
| NOTE: For sizing conventional/individual condensing units, add 8% to BTUH load. | |

| CAPACITIES | |
|----------------|------------------------|
| Facing Area | 36.46 ft ² |
| Cubic Capacity | 15.913 ft ³ |

| Evap Temp | Discharge Air Velocity (1 hr. after Defrost) | Discharge Air Temp |
|-----------|--|--------------------|
| +20°F | 250-300 FPM | 34°F |

Applications:
C321 - Shop-Around Island - Prototype



Specification Sheet



Issue: 9.26.2009