# **ISSUE DATE: SEPTEMBER 2018**

# **DN7LN - STRATUS**

# **MULTI-DECK SPECIFICATION SHEET**



Case Length (ft)



**APPLICATIONS** 















The above case model has case lengths that are UL and NSF

|  |         |         | • ,     |         |
|--|---------|---------|---------|---------|
| General Case Data  |         | 6'      |         | 12'     |
| Total Display Area (ft <sup>2</sup> )                          | 20.10   | 30.10   | 40.10   | 60.20   |
| Cubic Capacity (ft <sup>3</sup> )                              | 41.01   | 61.42   | 81.92   | 122.84  |
| Max Shelf Depth (in) [Top/Bottom]                              | 18/20   | 18/20   | 18/20   | 18/20   |
| Weight (lb)  | -       | -       | -       | -       |
| Refrigeration Data (General)                                   |         |         |         |         |
| Discharge Air Velocity (fpm)                                   | 200-300 | 200-300 | 200-300 | 200-300 |
| Fan Speed (rpm)  | 1900    | 1900    | 1900    | 1900    |
| Discharge Air Temp (°F)  | 33      | 33      | 33      | 33      |
| Conventional Thermal Load, Single (Btuh) one row of canopy LED | 6532    | 9806    | 13063   | 19611   |
| Parallel Thermal Load, Single (Btuh) one row of canopy LED     | 6046    | 9076    | 12091   | 18152   |
| Additional Btuh per ft LED - Canopy / Shelf & Nose             | 13 / 11 | 13 / 11 | 13 / 11 | 13 / 11 |
| Refrigeration Data (HFC)                                       |         |         |         |         |
| Evaporator Temperature (°F)                                    | 26      | 26      | 26      | 26      |
| Superheat Setpoint (°F)  | 6 - 8   | 6 - 8   | 6 - 8   | 6 - 8   |
| Estimated Refrigerant Charge (lbs)                             | 4.682   | 6.999   | 9.364   | 13.998  |
| Refrigeration Data (Glycol)                                    |         |         |         |         |
| Supply Temperature (°F)  | 20      | 20      | 20      | 20      |
| Flow (GPM)   | QTE     | QTE     | QTE     | QTE     |
| Fluid %  | 35      | 35      | 35      | 35      |
| Pressure Drop (PSID)   | QTE     | QTE     | QTE     | QTE     |
| Electrical Data (Amps/Watts)                                   |         |         |         |         |
| 115V/60Hz, 1 Phase   |         |         |         |         |
| Fans   | 0.29    | 0.59    | 0.59    | 1.17    |
| Canopy Lights (Per row)  |         |         |         |         |
|  |         |         |         |         |

0.22

0.08

0.33

0.10

0.44

0.15

0.67

0.23

| Defrost Data (off Cycle) |                                      |                       |                 |  |  |  |
|--------------------------|--------------------------------------|-----------------------|-----------------|--|--|--|
| Defrosts per Day         | Failsafe Duration (min) <sup>1</sup> | Termination Temp (°F) | Drip Time (min) |  |  |  |
| 6                        | 18                                   | 47                    | 0               |  |  |  |


**GE LED** 

**GE LED** 

Shelf Lights (Per row)


1 At ASHRAE conditions. For conditions above 75°F, 55% RH, increase defrost time by 15 min. Type I refrigerator, intended for use in an area where the environmental conditions are controlled and maintained that conditions do not exceed 75°F and 55% relative humidity. Heatcraft Worldwide Refrigeration, whose policy is one of continuous improvement, reserves the right to change at any time specifications, designs, or prices without incurring obligation. DOE 2017 Compliant

### **DN7LN CROSS VIEW**

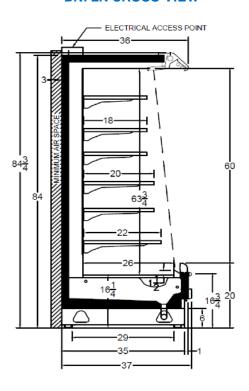

Add 3" thickness for a pair of ends.

# **DN7LN PLAN VIEW**

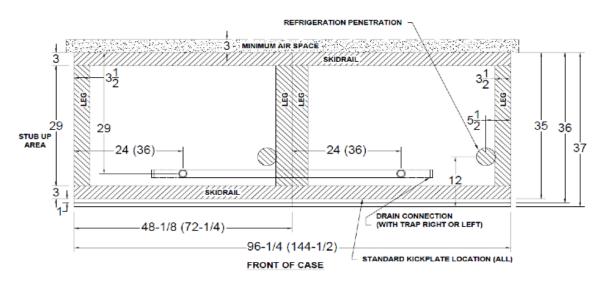

5201 Transport Blvd Columbus, GA 31907 P: 800.866.5596 • F: 706.568.8990



